


V
Variants for ports – M;G;U

Designations:

- ...X167 – Normal version (flanges);
- ...X167M – Metric threads;
- ...X167G – GAS threads;
- ...X167U – SAE threads;

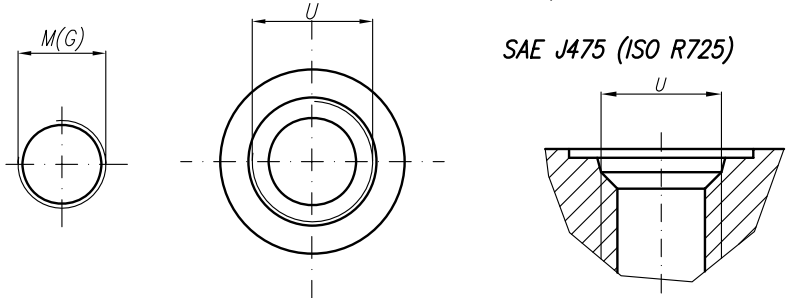

| Type | Displacement cm ³ /rev | Flow | | Pressure P _{nom} bar | max Speed n rpm | Dimension | | | | | | | | | | | | | | |
|------------------|--------------------------------------|----------------------|---------------------|-------------------------------------|-----------------------|-----------|---------|-------|------|-------|---------|------|---|-------------|------|----|---------|---|---|--|
| | | at 1500 rpm l/min | at max rpm l/min | | | A mm | B mm | Inlet | | | | | | Outlet | | | | | | |
| | | | | | | | | E | F | d | M | G | U | E | F | d | M | G | U | |
| 20A(C)4,5X167... | 4,5 | 6,14 | 14,33 | 250 | 3500 | 42,1 | 86,8 | | | | | | | | | | | | | |
| 20A(C)6,3X167... | 6,3 | 8,69 | 20,29 | 250 | 3500 | 42,1 | 86,8 | 30,2 | 13,1 | M6-6H | | G1/2 | | | 13,1 | | | | | |
| 20A(C)8,2X167... | 8,2 | 11,32 | 26,40 | 250 | 3500 | 42,1 | 86,8 | | | | | | | | | | | | | |
| 20A(C)10X167... | 10 | 13,95 | 32,55 | 250 | 3500 | 46,6 | 95,8 | | | | | | | | | | | | | |
| 20A(C)11X167... | 11,3 | 15,76 | 36,78 | 250 | 3500 | 47,6 | 97,9 | | | | | | | | | | | | | |
| 20A(C)12X167... | 12 | 16,92 | 39,48 | 250 | 3500 | 48,2 | 99,1 | | | | | | | | | | | | | |
| 20A(C)14X167... | 14 | 19,95 | 46,55 | 250 | 3500 | 49,6 | 102,1 | | | | | | | | | | | | | |
| 20A(C)15X167... | 15 | 21,60 | 36,00 | 250 | 2500 | 50,6 | 103,7 | 39,7 | 19 | M8-6H | M20x1,5 | G3/4 | 1 | 1/16"-12UNF | | | | | | |
| 20A(C)16X167... | 16 | 23,04 | 38,40 | 250 | 2500 | 51,6 | 105,3 | | | | | | | 30,2 | | | | | | |
| 20A(C)19X167... | 19 | 27,36 | 45,60 | 200 | 2500 | 53,6 | 110,3 | | | | | | | 14,2 | | | M6-6H | | | |
| 20A(C)22X167... | 22 | 31,68 | 42,24 | 180 | 2000 | 56,6 | 115,3 | | | | | | | | | | | | | |
| 20A(C)25X167... | 25 | 36,00 | 48,00 | 160 | 2000 | 58,8 | 120,2 | | | | | | | 39,7 | 19 | M8 | M20x1,5 | | | |